

Fibreworks Building

2301 Brennen Business Court, Jeffersontown (Louisville), Kentucky 40299

Insulated metal wall panel re-side · Prepared for review: Ben Easterday

Three separate structures measured on Kentucky 3-inch true-orthophoto with LiDAR heights

	Perimeter	Eave (LiDAR)	Wall area	Pcs @36"	Pcs @40"
A — Main warehouse	1,729 LF	~25 ft (ridge ~49)	43,225 sf	580	522
B — North building	575 LF	~23 ft	13,225 sf	194	174
C — NE annex	426 LF	~21 ft	8,946 sf	144	128

Scope check against the customer's 455 squares (45,500 sq ft)

- Building A alone: 43,225 sf at a 25-ft eave (432 SQ); 455 SQ corresponds to A at a 26.3-ft eave — within LiDAR tolerance.
- A + C: 52,171 sf (522 SQ). A + B + C: 65,396 sf (654 SQ).
- Conclusion: the 455 SQ scope most likely covers Building A only. Confirm with the customer before ordering.




1500 S. 2500 Breckenridge Business Ct, Louisville KY 40299 · TR-2026-455SQ · rev E


A main warehouse 1,729 LF · B north building 575 LF · C annex 426 LF
gray labels = wall ID (see schedule) · traced on 3-inch true-orthophoto · FIELD VERIFY













DETAIL — NORTH END: BUILDINGS B, C AND THE DOCK RECESS

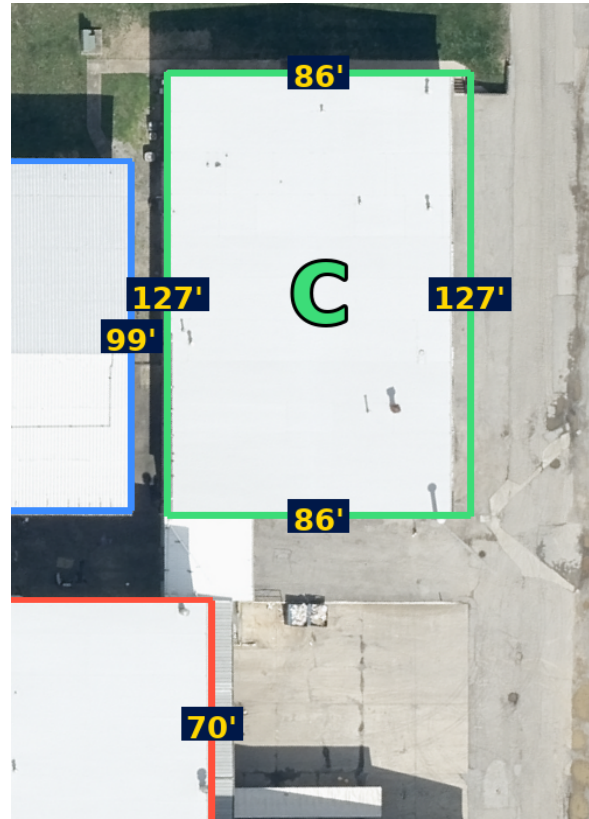

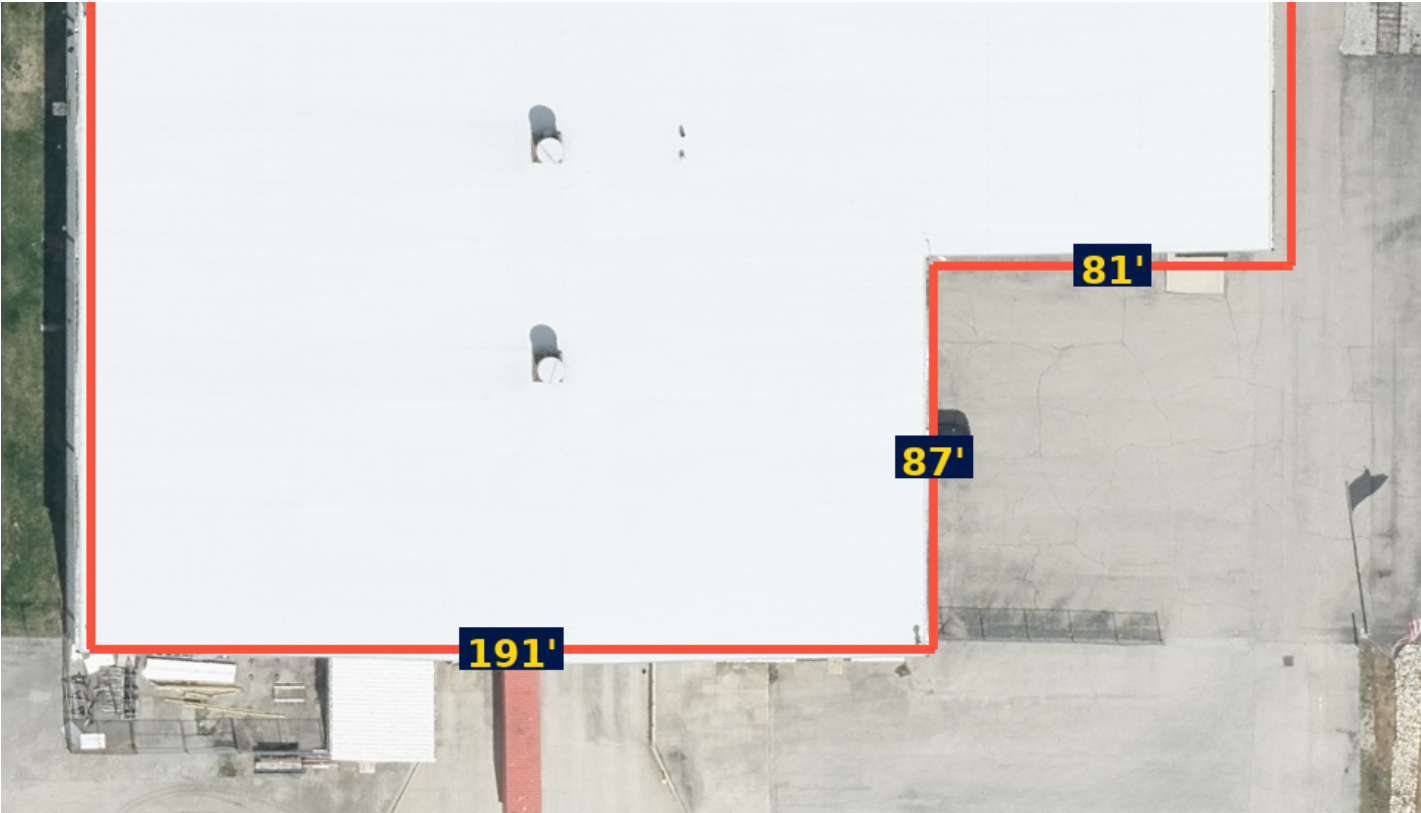

ELEVATIONS — BUILDING A WALL STRIPS (LiDAR eave)

221 W. Rte. 230, Leitchfield, Louisville KY 40299 · TR-2026-455SQ · rev E

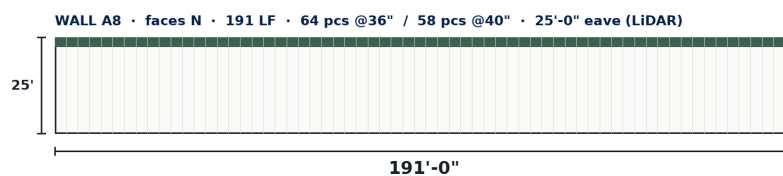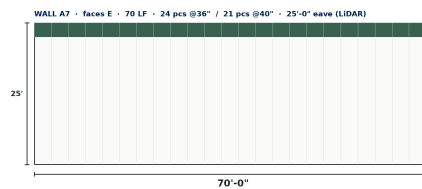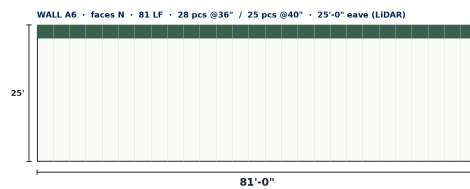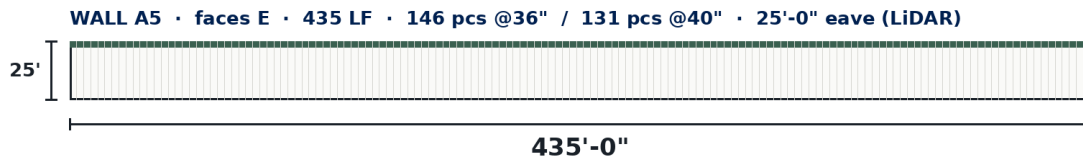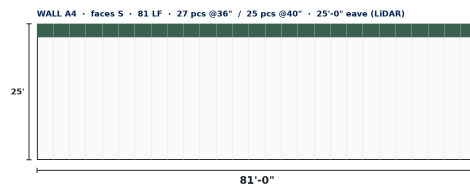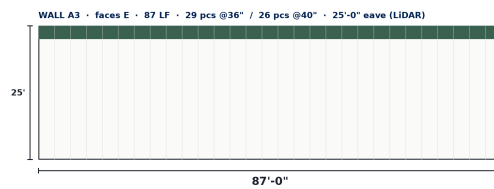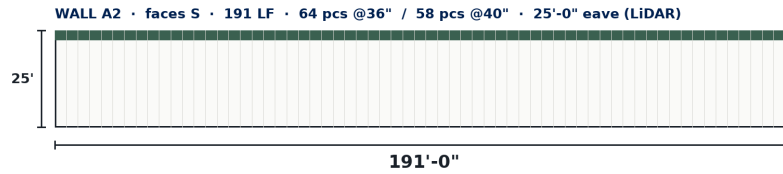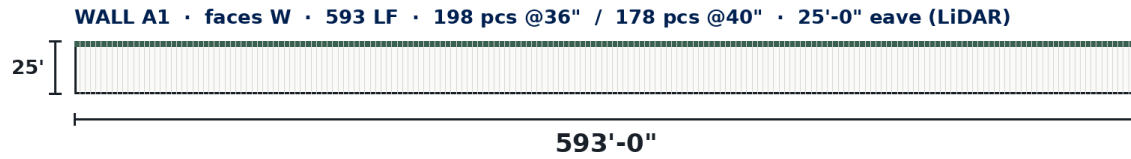

PANEL SCHEDULE — PER WALL, PER BUILDING

LIBREWIKS BUILDING, 2811 Duffin Business Ct, Louisville KY 40299 · TR-2026-455SQ · rev E

Wall	Faces	Length ft	Eave ft	Pcs @36"	Pcs @40"
A — Main warehouse					
A1	W	593	25	198	178
A2	S	191	25	64	58
A3	E	87	25	29	26
A4	S	81	25	27	25
A5	E	435	25	146	131
A6	N	81	25	28	25
A7	E	70	25	24	21
A8	N	191	25	64	58
A total		1,729		580	522
B — North building					
B1	W	100	23	34	30
B2	S	188	23	63	57
B3	E	99	23	34	30
B4	N	188	23	63	57
B total		575		194	174
C — NE annex					
C1	N	86	21	29	26
C2	E	127	21	43	38
C3	S	86	21	29	26
C4	W	127	21	43	38
C total		426		144	128

TRIM (per building, quote line by line)

A: base + eave trim 1,729 LF each · 8 corners × 25' · jamb/head trim at louvers, doors, dock openings — field measure
B: base + eave trim 575 LF each · 4 corners × 23' C: base + eave trim 426 LF each · 4 corners × 21'
Closures & fasteners per manufacturer schedule · possible two-tone exterior (white body / green band)

How these measurements were made and checked

- Footprints traced on the Commonwealth of Kentucky 3-inch true-orthophoto (KyFromAbove) — a straight-down survey product, s
- Three structures traced separately (A, B, C); yard canopies, trailers and dock aprons excluded. Every corner checked at zoom on
- Wall heights from Kentucky statewide LiDAR (first-return surface minus bare-earth): eave-band medians A ~25 ft, B ~23 ft, C ~21
- Cross-checks: OSM footprint 181.5k sf vs A+B+C traced 178.1k sf (2%); FEMA/ORNL structure data 164k sf (excludes connector
- Scope identity: A perimeter × LiDAR eave = 43,225 sf; the customer's 45,500 sf equals A at a 26.3-ft eave — inside LiDAR tolera

Limitations

- Aerial takeoff accuracy $\pm 2\%$ on lengths, ± 2 ft on heights. FIELD VERIFY before releasing a cut list to fabrication.
- Gable-end walls on A (north and south faces) carry raked tops: panel lengths vary from eave to ridge — cut list at field measure.
- Openings (dock doors, louvers, personnel doors, windows) are not deducted; pricing basis is gross sq ft with opening trim itemize
- Scope (which buildings) must be confirmed with the customer; scenarios are on page 1 and in the schedule workbook.



Height above ground from LiDAR (feet). Warm colors = taller. Eave bands read ~21-25 ft; A's gable ridge ~49 ft.

